

- Highest power density in 5.0" x 3.0" footprint
- Supplies 200 W (convection cooling!)
- Highest efficiency up to 95%
- Operating temperature range -25°C to +70°C
- Universal input 85 – 264 VAC
- Compliance with EN 61000-3-2
- Power Back immunity
- Low leakage current
- Protection class I and class II
- 3-year product warranty



The new TOP 200 Series AC/DC Power Supplies feature the highest power rating in the industry standard 3.0" x 5.0" (76.2 x 127 mm) footprint. They can supply up to 200 W output power with convection cooling over an industrial operating temperature range of -25°C to +70°C. This performance could be realized by a state of the art design providing an extremely high efficiency of >90 % which eliminates the need for a dedicated power supply cooling fan.

Compliance with global safety and EMC standards qualify these power supplies for worldwide markets. Approved for Class I and Class II applications, these switchers are suitable for industrial and IT systems but also for consumer products. High reliability is provided by use of industrial quality grade components and an excellent thermal management. This product offers an interesting power supply solution for many space and cost critical applications in commercial and industrial electronic equipment.

Models

| Order Code | Output Power max. | Output Voltage nom. | Output Current max. | Efficiency typ. |
|-------------|-------------------|---------------------|---------------------|-----------------|
| TOP 200-112 | 200 W | 12 VDC | 16'000 mA | 93 % |
| TOP 200-115 | | 15 VDC | 13'000 mA | 93 % |
| TOP 200-124 | | 24 VDC | 8'300 mA | 95 % |
| TOP 200-148 | | 48 VDC | 4'200 mA | 95 % |

Options

| | |
|--|--|
| <p>on demand (backorder with MOQ non stocking item)</p> | <p>- Encased version: www.tracopower.com/overview/top200c</p> |
|--|--|

Input Specifications

| | | |
|------------------------|--|--|
| Input Voltage | | Operational Range: 85 - 264 VAC (Full Range) Rated Range: 100 - 240 VAC (Full Range) |
| Input Frequency | | Operational Range: 47 - 63 Hz Certified: 50/60 Hz |
| Power Consumption | - No load & Vin = 230 VAC - No load & Vin = 115 VAC | 4'000 mW max. 5'300 mW max. |
| Input Inrush Current | - At 230 VAC | 40 A max. |
| Power Factor | - At 230 VAC | 0.98 min. (Active Power Factor Correction) |
| Input Protection | | T 4 A (Internal Fuse in L & N) |
| Recommended Input Fuse | | 6'000 mA (slow blow) (The need of an external fuse has to be assessed in the final application.) |

Output Specifications

| | | |
|--|--|---|
| Voltage Set Accuracy | | ±3% max. |
| Regulation | - Input Variation (Vmin - Vmax) - Load Variation (0 - 100%) | 1% max. 1% max. |
| Ripple and Noise (20 MHz Bandwidth) | | 12 VDC model: 120 mVp-p max. 15 VDC model: 120 mVp-p max. 24 VDC model: 120 mVp-p max. 48 VDC model: 150 mVp-p max. |
| Capacitive Load | | 12 VDC model: 15'000 µF max. 15 VDC model: 15'000 µF max. 24 VDC model: 4'000 µF max. 48 VDC model: 1'000 µF max. |
| Minimum Load | | Not required |
| Temperature Coefficient | | ±0.02 %/K max. |
| Hold-up Time | - At 230 VAC - At 115 VAC | 10 ms min. 10 ms min. |
| Start-up Time | - At 230 VAC - At 115 VAC | 2'000 ms max. 3'000 ms max. |
| Short Circuit Protection | | Automatic recovery 60% typ. of Iout nom. |
| Overload Protection | | Foldback Mode |
| Output Current Limitation | | 120 - 150% of Iout max. |
| Overvoltage Protection | | 150% typ. of Vout nom. (depending on model) 20 V typ. (12 Vout model) 25 V typ. (15 Vout model) 35 V typ. (24 Vout model) 60 V typ. (48 Vout model) |
| Transient Response | - Peak Variation - Response Time | 600 mV max. (10% to 90% Load Step) 20'000 µs max. (10% to 90% Load Step) |

Safety Specifications

| | | |
|-----------------------|-----------------------------|---|
| Safety Standards | - IT / Multimedia Equipment | EN 60950-1 EN 62368-1 IEC 60950-1 IEC 62368-1 UL 60950-1 |
| | - Certification Documents | www.tracopower.com/overview/top200 |
| Protection Class | | Class I & II (Prepared): Reinforced Insulation |
| Pollution Degree | | PD 2 |
| Over Voltage Category | | OVC II |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

EMC Specifications

| | | |
|----------------------|---|---|
| EMI Emissions | <ul style="list-style-type: none"> - Conducted Emissions - Radiated Emissions - Harmonic Current Emissions | EN 61000-6-3 (Generic Residential) EN 55032 class B (internal filter) EN 55032 class B (internal filter) EN 61000-3-2, class A (conductive plane to be connected to safety earth to meet all EMI specifications) |
| EMS Immunity | <ul style="list-style-type: none"> - RF Electromagnetic Field - EFT (Burst) / Surge - Conducted RF Disturbances - PF Magnetic Field - Voltage Dips & Interruptions | EN 61000-4-3, 20 V/m, perf. criteria A EN 61000-4-4, ± 2 kV, perf. criteria B L to L: EN 61000-4-5, ± 1 kV, perf. criteria B L to PE: EN 61000-4-5, ± 2 kV, perf. criteria B EN 61000-4-6, 10 Vrms, perf. criteria A Continuous: EN 61000-4-8, 100 A/m, perf. criteria A 230 VAC / 50 Hz: EN 61000-4-11 20%, 250 periods, perf. criteria A 30%, 25 periods, perf. criteria A 60%, 10 periods, perf. criteria B >95%, 1 period, perf. criteria B 115 VAC / 60 Hz: EN 61000-4-11 20%, 250 periods, perf. criteria A 30%, 25 periods, perf. criteria B 60%, 10 periods, perf. criteria B >95%, 1 period, perf. criteria B |

General Specifications

| | | |
|----------------------------------|--|--|
| Relative Humidity | | 95% max. (non condensing) |
| Temperature Ranges | <ul style="list-style-type: none"> - Operating Temperature - Storage Temperature | -25°C to +70°C -40°C to +80°C |
| Power Derating | <ul style="list-style-type: none"> - High Temperature - Low Input Voltage | 2 %/K above 40°C (12 & 15 Vout models) 2 %/K above 50°C (24 & 48 Vout models) 1 %/V below 115 VAC (12 & 15 Vout models) 1.5 %/V below 108 VAC (24 & 48 Vout models) |
| Cooling System | | Natural convection (20 LFM) |
| Remote Control | <ul style="list-style-type: none"> - Voltage Controlled Remote - Current Controlled Remote | See application note: www.tracopower.com/overview/top200 See application note: www.tracopower.com/overview/top200 |
| Altitude During Operation | | 2'000 m max. |
| Switching Frequency | | 100 kHz typ. (PWM) |
| Insulation System | | Reinforced Insulation |
| Isolation Test Voltage | <ul style="list-style-type: none"> - Input to Output, 60 s - Input to Case or PE, 60 s - Output to Case or PE, 60 s | 3'000 VAC 1'500 VAC 500 VAC |
| Creepage | <ul style="list-style-type: none"> - Input to Output - Input to Case or PE - Output to Case or PE | 7 mm min. 4 mm min. 1 mm min. |
| Clearance | <ul style="list-style-type: none"> - Input to Output - Input to Case or PE - Output to Case or PE | 5 mm min. 2.5 mm min. 0.5 mm min. |
| Isolation Resistance | - Input to Output, 500 VDC | 100 M Ω min. |
| Isolation Capacitance | - Input to Output, 100 kHz, 1 V | 1'500 pF typ. |
| Leakage Current | <ul style="list-style-type: none"> - Earth Leakage Current - Touch Current | 500 μ A max. 100 μ A max. |
| Reliability | - Calculated MTBF | (see application note) |

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

| | | |
|--------------------------|---------------------|---|
| Environment | - Vibration | IEC 60068-2-6 3 axis, sine sweep, 10-55 Hz, 0.075 mm |
| | - Mechanical Shock | IEC 60068-2-27 15 g, 3 axis, half sine, 11 ms |
| Housing Type | | Open Frame |
| Mounting Type | | Chassis Mount |
| Connection Type | | Pin Connector |
| Weight | | 360 g |
| Power Back Immunity | | 12 VDC model: 16 V max. (18 V for 1 s) 15 VDC model: 20 V max. (23 V for 1 s) 24 VDC model: 35 V max. (40 V for 1 s) 48 VDC model: 63 V max. (68 V for 1 s) |
| Environmental Compliance | - REACH Declaration | www.tracopower.com/info/reach-declaration.pdf REACH SVHC list compliant REACH Annex XVII compliant |
| | - RoHS Declaration | www.tracopower.com/info/rohs-declaration.pdf Exemptions: 7a, 7c-I (RoHS exemptions refer to the component concentration only, not to the overall concentration in the product (O5A rule). The SCIP number is provided on request.) |


Supporting Documents

Overview Link (for additional Documents)

www.tracopower.com/overview/top200

All specifications valid at nominal voltage, resistive full load and +25°C after warm-up time, unless otherwise stated.

Outline Dimensions

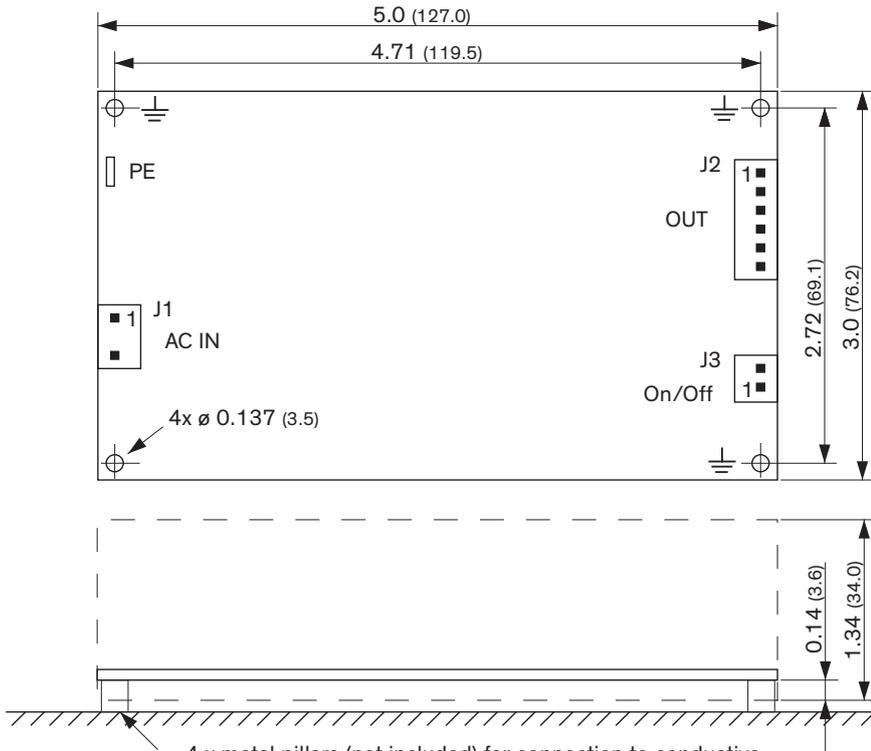

4 x metal pillars (not included) for connection to conductive plate in order to meet all EMC specifications
 Minimum height: 0.2 (5.0), max. diameter: 0.25 (6.0)

Dimensions in Inch (mm)
 Tolerances: ±0.008 (±0.2)

| Input | |
|-------|----------|
| J1 | |
| Pin | Function |
| 1 | AC (L) |
| 2 | AC (N) |

| Output | |
|--------|----------|
| J2 | |
| Pin | Function |
| 1-3 | + Vout |
| 4-6 | - Vout |

| On / Off | |
|----------|----------|
| J3 | |
| Pin | Function |
| 1 | - |
| 2 | + |